

FAT BASTARD – TECHNICAL RIDER




Fat Bastard (Stageplan)

Made using:
MyStagePlan

<http://www.fatbastard.be>

Contact: Jorn Mazet (+32 472 64 85 31 / jorn@fatbastard.be)

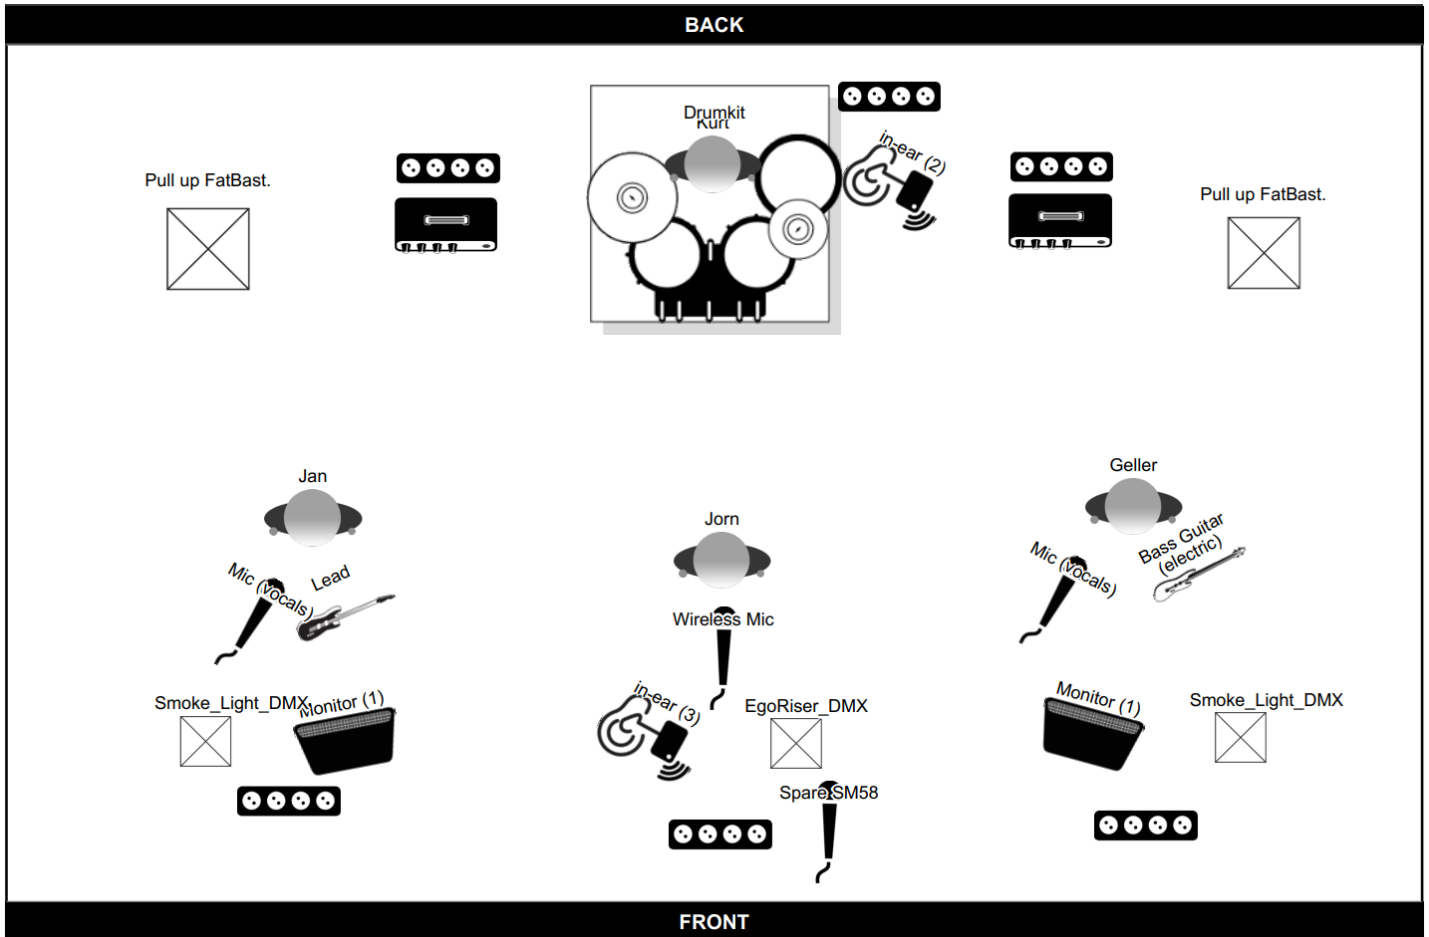

VOCALS

Lead vocals:

Jorn (Lead vocals) uses own wireless microphone set (Line 6 XD V75 with SM58 replication - <https://be.line6.com/wireless-microphone-system/>).

Please foresee spare SM58 in case of technical difficulties.

Shure PSM 900 wireless in ear monitoring system. 2x XLR to feed the transmitter is needed. (<http://www.shure.com/americas/products/personal-monitor-systems/psm-900>)

Please also foresee 1 220V socket for lyrics monitor.

Backing vocals:

2x additional Shure SM58 vocal microphones or equal/better quality with stand (backing vocals by lead guitar and bass)

BASS & GUITAR

Both 3x 220V sockets at backside of stage (amps)

3x 220V sockets front of stage (effect pedals)

The bass amp is D.I.-ready (Sansamp module) or Neumann U47 microphone or equal/better quality at amp cab.

For the guitar amp we prefer Sennheiser evolution e906 Dynamic Guitar amp microphones or equal/better quality for the amp cabs.

DRUMS

The drumkit consists out of 1 snare, 2 kicks, 1 tom, 2 floortoms, 1 hihat, 1 ride, 4 crashes and 2 china's. When the stage allows it, 1 gong drum and 1 floortom is added.

Good to know;

- left handed drummer on a right handed kit; so the Ride will definitely be on the **left!!**
- Both kicks and the gong drum are equipped with built-in microphones, with male XLR connectors on top of the kicks (<https://heilsound.com/products/pr-48/>)

Drum riser

If you should foresee a drum riser, a minimum of 2x2m is necessary.

If height is over 60cm, please also foresee a step.

MONITOR MIX

We all start with a balanced mix of all instruments (if FOH sound is available, please give us that). Adjustments will be asked at soundcheck.

ADDITIONALLY

We have a backdrop/flag 4m wide – 3m high, and we'd like the opportunity to hang it behind the drummer. Thanks to foresee possibilities!

Ego Riser with built-in smoke/light center stage. Please foresee 1 x 220V socket.

2 hazes front stage, near bass monitor and guitar monitor, both needing 1 x 220V socket.

Type: <https://www.adj.com/fog-fury-jett>

All 3 hazers should be steered by DMX/light table if possible.